


BF 250

INTERNAL BALANCED FLUE

HOT WATER SYSTEM

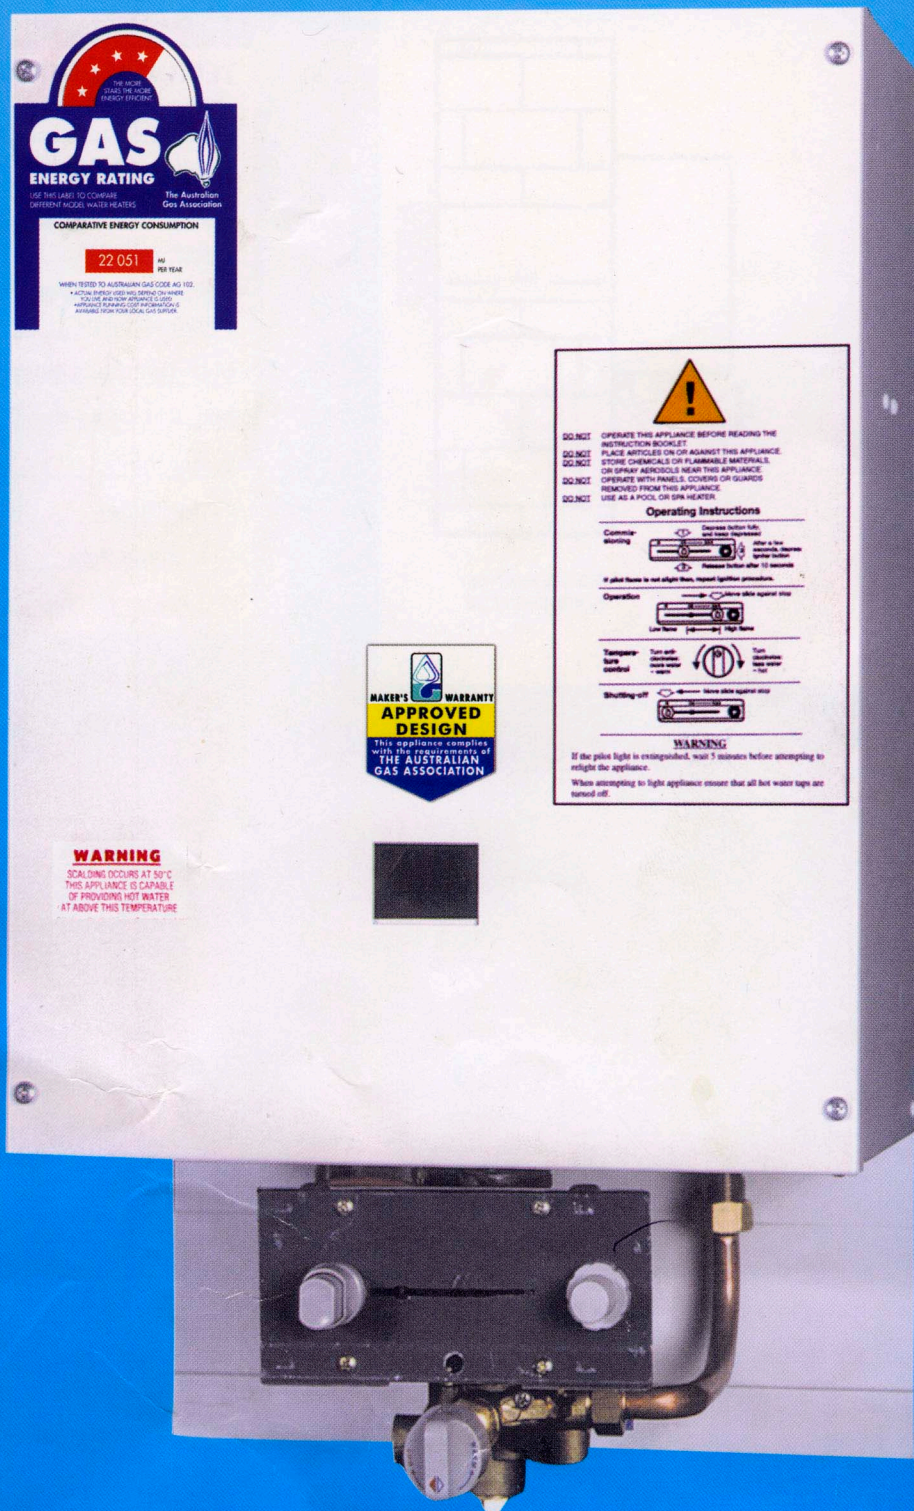


DOUGLAS & CO

EST. 1880

BF 250

CONTINUOUS FLOW HOT WATER INTERNAL BALANCED FLUE

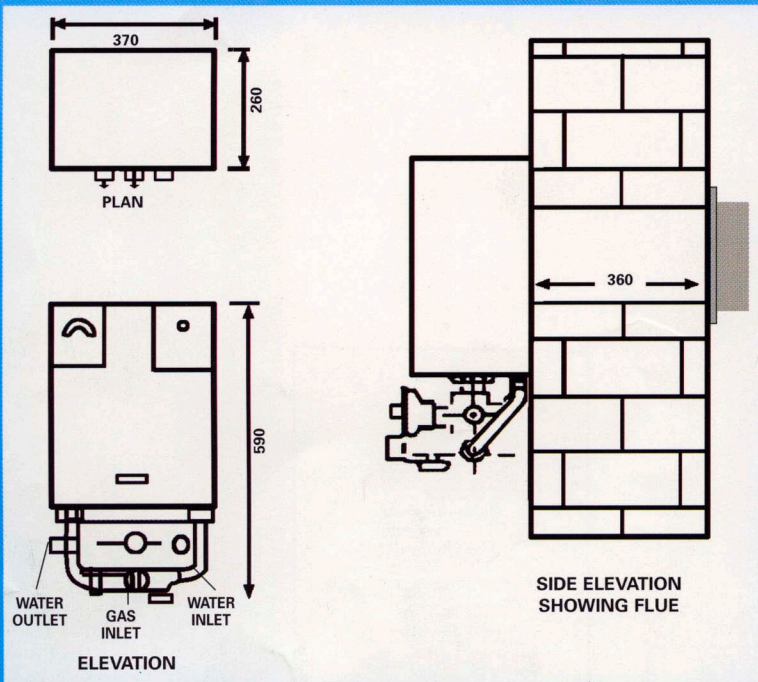

TECHNICAL INFORMATION

Heat Input	70 M.I./Hr.
Thermal Efficiency	78.75%
Water Flow rate 30 degrees above ambient	0.14 L/S
Water Flow rate 20 degrees above ambient	10.2/Min
Max. Operating Head	1000KPa
Min. Operating Head	70KPa
Water Inlet	1/2 inch
Water Outlet	1/2 inch
Gas connection	1/2 inch
A G A Star Rating	4 1/2

COMPACT & CONVENIENT

- Replaces any other balanced flue hot water service
- Install anywhere, even under the sink
- Totally install flue from inside the building

QUALITY & EFFICIENCY



- Modulating gas control
- Adjustable temperature control
- Manufactured in Australia

www.douglassolar.com.au
DOUGLAS & CO

1/47 RUSHDAL STREET
KNOXFIELD 3180

PHONE: 9764 8433
Mobile: 0438 11 8813

Distributed by:

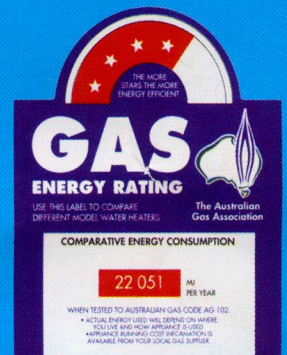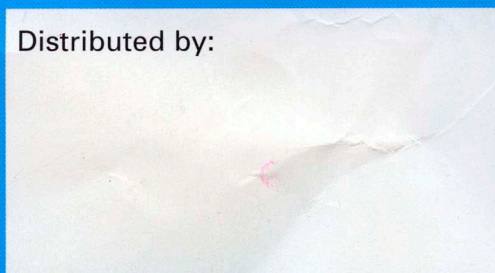

AUSTRALIAN GAS
ASSOCIATION
APPROVAL NO. 5797



The WaterMark
AS 3498 Lic W184
Standards Australia